


# JBC323U691

## Fanless Embedded NUC Barebone 2 LAN / 2 HDMI / VGA / COM / mSATA+2.5"

### Features

- Fanless Embedded Barebone System with Planned Lifecycle Through Q3'2031
- Fanless Black Aluminum Enclosure
- Intel Celeron N3350 Dual-core / Celeron J3455 Quad-core
- Up to 8GB DDR3L-1866 Total Memory
- 2 \* HDMI Ports (3840 x 2160 @30Hz), VGA
- 1 \* Full-size mSATA Slot, 1 \* 2.5" Internal Bay
- Wireless 802.11 b/g/n + Bluetooth 4.0 (option)
- Dual Gigabit LAN, HD Audio, 1 \* Serial Port
- 4 \* USB 3.0 Ports, Watchdog Timer
- Includes Wall+VESA+DIN Rail Mounts
- 65 x 110 x 116mm (2.56" x 4.33" x 4.57")

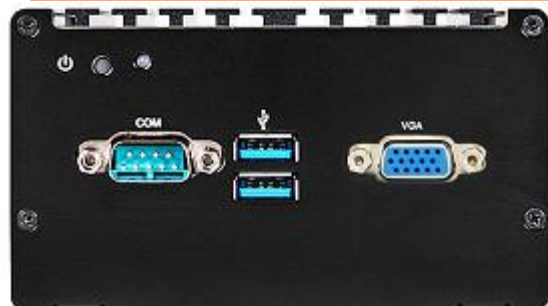

<b>Model</b>	■ JBC323U691
<b>Part No</b>	■ HBJC323U691-335B (non-WIFI), HBJC323U691W-335B (WIFI) ■ HBJC323U691-345B (non-WIFI), HBJC323U691W-345B (WIFI)
<b>Processor</b>	■ Fanless Intel Celeron N3350 Dual-core, Apollo Lake, 6W TDP ■ Fanless Intel Celeron J3455 Quad-core, Apollo Lake, 10W TDP
<b>Memory</b>	■ 1 * 204-pin DDR3L-1866 SO-DIMM up to 8GB total memory
<b>Storage</b>	■ 1 * Full-size mSATA slot (6Gb/s), 1 * 2.5" SATA3 bay
<b>Network</b>	■ 2 * Realtek RTL8111H Gigabit LAN, Mini-PCIE slot or Wireless b/g/n + BT 4.0 (on "W" model)
<b>Other Features</b>	■ HD Audio, AHCI, Watchdog Timer 10-255 min/sec., 3G SIM card holder, AT/ATX power mode
<b>Rear Panel I/O</b>	■ 2 * USB 3.0, 2 * HDMI 4K @30Hz, 2 * RJ45, line-out/Mic combo, Antenna holes, 12V DC jack
<b>Front Panel I/O</b>	■ Power button, Reset, LED, 2 * USB 3.0 ports, 1 * Serial RS232/422/485 port, VGA port
<b>BIOS</b>	■ AMI Flash ROM
<b>Box Contents</b>	■ 40W 12V AC Adapter, US Power Cord, Manual, Drivers, Wall+VESA+DIN bracket, DIN Rail Clips
<b>Compliance</b>	■ CE, FCC, RoHS, ErP Ready
<b>Temperature</b>	■ Operating Temperature 0~40 ° C, Storage Temperature -20-85 ° C
<b>Dimensions</b>	■ 110 x 116 x 65mm (DxWxH)
<b>OS Support</b>	■ Supports Win 10 64bit, Latest Linux
<b>Warranty</b>	■ 2 Years limited warranty

\*Specifications subject to change without notice, not responsible for typographical errors. Does not include memory, HDD, optical, or OS.

