


# JBC430U941

## Thin NUC Fanless Embedded Barebone 4 Intel LAN / 32GB eMMC / HDMI / 12V

### Features

- Fanless Embedded Networking Barebone System with Planned Lifecycle Through Q1'2031
- Fanless Black Aluminum Enclosure
- Intel Celeron N3160 Quad-core SoC, AES-NI
- Supports DDR3L-1600 SODIMM up to 8GB Total
- Onboard 32GB eMMC, M.2 SATA 2242 Slot
- 4 \* Intel i211-AT Gigabit LAN
- HDMI Port, RJ45 COM Port, TPM 2.0
- 1 \* Full-size mini-PCIE Slot with SIM (USB only)
- Watchdog Timer, 12V DC-in Jack, 40W Adapter
- Includes Wall + VESA + DIN Rail Mount kit
- Only 34 x 109.4 x 129mm (1.34" x 4.3" x 5.08")

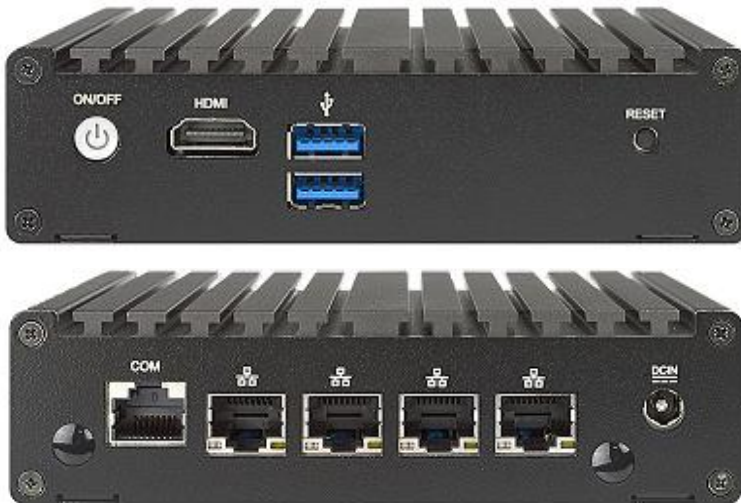

<b>Model</b>	■ JBC430U941
<b>Part No</b>	■ HBJC430U941-316B
<b>Processor</b>	■ Fanless Intel Celeron N3160 Quad-core Braswell, 6W TDP, 14nm, AES-NI
<b>Memory</b>	■ 1 * 204-pin DDR3L-1600 SODIMM slot supporting up to 8GB total, 1.35V
<b>Storage / Mini-PCIE</b>	■ Onboard 32GB eMMC ■ M.2 SATA 2242 slot ■ 1 * Full-size Mini-PCIE slot (USB only), SIM card holder
<b>Network</b>	■ 4 * Intel i211-AT Gigabit LAN
<b>Other Features</b>	■ AHCI, Watchdog Timer 10-255 min/sec., Onboard TPM 2.0
<b>Rear Panel I/O</b>	■ 4 * RJ45 LAN, 1 * RJ45 COM, 2 * Antenna holes, 12V DC In jack
<b>Front Panel I/O</b>	■ Power button, Reset button, HDMI, 2 * USB 3.0 ports
<b>BIOS</b>	■ AMI Flash ROM
<b>Box Contents</b>	■ 40W 12V AC Adapter, US Power Cord, Wall+VESA+DIN mounting bracket, Port dust covers
<b>Compliance</b>	■ CE, FCC, RoHS, ErP Ready
<b>Temperature</b>	■ Operating Temperature 0~50 ° C, Storage Temperature -20-85 ° C
<b>Dimensions</b>	■ 109.4 x 129 x 34mm (DxWxH)
<b>OS Support</b>	■ Win 7, Win 8.1, Win 10, Linux
<b>Warranty</b>	■ 2 Years limited warranty

\*Specifications subject to change without notice, not responsible for typographical errors. Does not include HDD or OS.



**Jetway Computer Corporation**  
**Phone: 510-857-0130 Fax: 510-857-0138**  
**8058 Central Ave., Newark, CA 94560**  
**www.jetwaycomputer.com**