


GOT321A-ELK-WCD NEW

21.5" FHD TFT Multi-touch Panel Computer with Intel® Celeron® Processor J6412

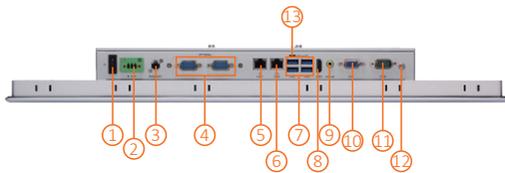

- | | | |
|---|--------------------------------|-------------------------------|
| 1. Power button | 6. 1 x 2.5GbE LAN | 12. Grounding hole |
| 2. DC power input | 7. 4 x USB 3.2 Gen2 | 13. AT/ATX switch |
| 3. Remote power switch | 8. 1 x HDMI | 14. Backlight on/off |
| 4. Flexible I/O
(default 2 x RS-232) | 9. 1 x Line-in/out | 15. Brightness settings +/- |
| 5. 1 x 1GbE LAN | 10. 1 x VGA | 16. Speaker |
| | 11. 1 x COM for RS-232/422/485 | 17. 3 x Wireless antenna hole |

Features

- 21.5" FHD projected capacitive multi-touch widescreen
- Fanless design with Intel® Celeron® processor J6412
- Supports WLAN module and antenna (optional)
- 2.5" SATA SSD
- 2 LAN, 4 USB, 1 COM, 1 HDMI, and 1 VGA
- IP65-rated aluminum front bezel
- Supports panel mount, VESA mount, desktop stand, and wall mount



▲ Rear View

▲ Side View

Introduction

The GOT321A-ELK-WCD is a multi-touch fanless panel PC with 21.5-inch FHD LCD and supports Intel® Celeron® processor J6412. It provides M.2 Key E and PCI Express Mini Card slots for add-on devices such like Wi-Fi module.

21.5-inch FHD LCD with Projected Capacitive Multi-touch

The GOT321A-ELK-WCD supports 400 nits brightness, able to display contents in FHD resolution. With projected capacitive multi-touch screen, users can operate the device more directly and friendly. The touch glass surface is up to 7H for anti-scratch purpose.

Specifications

Front Bezel	IP65 front bezel	
LCD Panel	Display Type	21.5" FHD TFT LCD
	Brightness (cd/m ²)	400 nits
	Resolution	1920 x 1080
Main System	CPU	Intel® Celeron® processor J6412 (TDP 12W) (Elkhart Lake)
	Chipset	SoC integrated
	System Memory	1 x 260-pin DDR4-2133/2400/2666/3200 SO-DIMM, up to 32GB
	BIOS	AMI UEFI BIOS
	Storage	1 x mSATA
		1 x 2.5" SATA SSD (7 mm and 9.5 mm height; removable)
	Watchdog Timer	255 levels, 0 to 255 sec.
Onboard Graphics	Integrated with Intel® UHD Graphics	

I/O Connector	1 x Flexible I/O (default 2 x RS-232) 1 x COM for RS-232/422/485 1 x RJ-45 2.5Gb Base-T Ethernet (Intel® I226-LM with TSN) 1 x RJ-45 1Gb Base-T Ethernet (Intel® I210-AT) 4 x USB 3.2 Gen2 (10 Gbps) 1 x Phoenix type connector for DC power input 1 x Switch for power on/off (ATX) 1 x Line-in/out 1 x HDMI 1.4 (4K60Hz YCbCr420) 1 x VGA 1 x Remote power switch 1 x AT/ATX switch (DC type only) 1 x Grounding hole (DC version)
TPM	dTPM 2.0
Expansion Interface	1 x Full-size PCI Express Mini Card slot (PCIe + SATA + USB) 1 x M.2 Key E 2230 (for Wi-Fi)
Touchscreen	Projected capacitive multi-touch
Power Supply	9 to 36VDC 1 x Terminal block
Power Consumption	72W (Maximum)
Dimensions	542 mm (21.34") (W) x 59.4 mm (2.3") (D) x 338 mm (10.4") (H)
Packing Dimensions	720 mm (28.34") (W) x 215 mm (8.46") (D) x 555 mm (21.85") (H)
Weight (net/gross)	7.65 kg (16.87 lb)/10.152 kg (22.38 lb)
Operating Temperature	-10°C to 50°C (+14°F to +122°F)
Relative Humidity	20% to 90% @ +40°C; non-condensing
Operation Vibration	1G, 5 to 500Hz, random for 2.5" SATA SSD
Certifications	CE, EN 61000-6-2, EN 61000-6-4, and FCC Class A

Ordering Information

GOT321A-ELK-WCD (P/N: E22B321A00)	21.5" FHD TFT fanless touch panel computer with Intel® Celeron® processor J6412, projected capacitive multi-touch screen, and 9 to 36 VDC terminal block with small Phoenix connector
--------------------------------------	---

*Other configuration by request

**Specification and certifications may vary based on different requirements

Packing List

1 x GOT321A-ELK-WCD
1 x Phoenix connector
1 x Panel mount kit

Optional Accessories

4G LTE kit

Wi-Fi kit

RFID kit

Barcode scanner kit

881231770A0E	Wall mount kit
509000001500	Adaptor 24V/120W, wire only, FSP120-AAAN3
E392902101	AX92902+AX93287 full-size PCI Express Mini Module with Gigabit LAN
E392903100	AX92903 full-size PCI Express Mini Module with CAN Bus
E392904101	AX92904 full-size PCI Express Mini Module with 32-bit DIO

Optional EOS Installation

Windows® 10 IoT, Windows® 11 IoT

Optional OS Installation

Windows® 10, Windows® 11, and Linux

Dimensions

