

GrandTwin SuperServer SYS-211GT-HNC8F

2U 4-Node GrandTwin with up to 4 hot-swap 2.5" NVMe/SAS/SATA drives per node and front I/O



More details here

Key Applications



HPC, Cloud Gaming, MEC (Multi-Access Edge Computing), Multi-Purpose CDN, High-availability Cache Cluster, Telco Edge Cloud, EDA (Electric Design Automation), Mission Critical Web Applications,

Key Features

- Single-Socket, 5th/4th Gen Intel® Xeon® Scalable processors up to 350W TDP;
- Intel® C741;
- 16 DIMM Slots supporting up to 4TB of memory; ECC RDIMMs up to DDR5-5600;
- Optional AIOM module or PCIe 5.0 x16;
- Integrated GrandTwin I/O Module with BMC, 2x USB, VGA and 2x 10GbE or 2x 25GbE;
- Two optional storage modules. Each module supports 2x NVMe or SAS/SATA drive bays;
- 2200W Redundant Power Supplies Titanium Level (96%+); Shared Power Design;
- Built-in SAS3 Support via Broadcom 3808; IT Mode;
- Four **hot-pluggable** systems (nodes) in a 2U form factor. Each node supports the following;



| | |
|--------------------------|--|
| Form Factor | 2U Rackmount Enclosure: 449 x 88 x 711.2mm (17.67" x 3.46" x 28") Package: 626 x 248 x 1150mm (24.65" x 9.76" x 45.28") |
| Processor | Single Socket E (LGA-4677) 5th Gen Intel® Xeon® / 4th Gen Intel® Xeon® Scalable processors Supports Intel Xeon CPU Max Series with high bandwidth memory (HBM) Up to 64C/128T; Up to 320MB Cache |
| System Memory | Slot Count: 16 DIMM slots/2 Channels Max Memory (2DPC): Up to 4TB 5600MT/s ECC DDR5 RDIMM |
| Drive Bays Configuration | Default: Total 4 bay(s) • 4 front hot-swap 2.5" NVMe/SAS/SATA drive bay(s) M.2: 2 M.2 NVMe/SATA slot(s) (M-key) |
| Expansion Slots | Default • 1 PCIe 5.0 x16 LP slot(s) |
| On-Board Devices | SAS: SAS (12Gbps) via Broadcom® 3808; (IT mode) Chipset: Intel® C741 Network Connectivity: Via IO Module IPMI: Support for Intelligent Platform Management Interface v.2.0 IPMI 2.0 with virtual media over LAN and KVM-over-LAN support |
| Input / Output | LAN: 1 RJ45 1 GbE Dedicated BMC LAN port(s) USB: 2 USB 3.0 port(s) Video: 1 VGA port(s) |

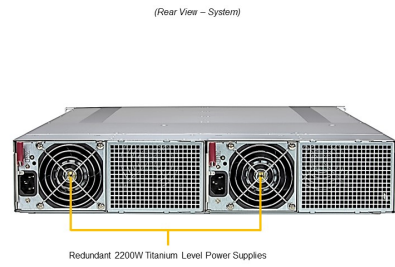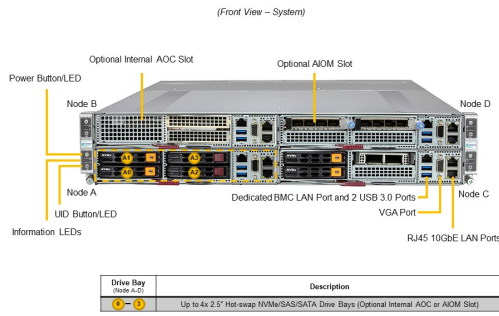

| | |
|-----------------------|--|
| System Cooling | Fans: 2x 16K RPM Heavy Duty 8cm Fan(s) |
| Power Supply | 2200W Redundant Titanium Level power supplies |
| System BIOS | BIOS Type: AMI 32MB Flash ROM |
| Management | Redfish API; Supermicro Server Manager (SSM); Supermicro Power Manager (SPM); Supermicro Update Manager (SUM); SuperDoctor® 5; Super Diagnostics Offline ; KVM with dedicated LAN ; IPMI 2.0 |
| PC Health Monitoring | FAN: Fans with tachometer monitoring Status monitor for speed control Pulse Width Modulated (PWM) fan connectors Temperature: Monitoring for CPU and chassis environment CPU: Monitors for CPU Cores, Chipset Voltages, Memory. 8+4 Phase-switching voltage regulator |
| Dimensions and Weight | Weight: Gross Weight: 88 lbs (39.9 kg) Net Weight: 68 lbs (30.8 kg) Available Color: Silver |
| Operating Environment | RoHS Compliant Operating Temperature: 5°C ~ 40°C (41°F ~ 104°F) Non-operating Temperature: -30°C to 60°C (-22°F to 140°F) Operating Relative Humidity: 8% to 80% (non-condensing) Non-operating Relative Humidity: 8% to 90% (non-condensing) |
| Motherboard | Super X13SET-GC |
| Chassis | CSE-GT214BF-R2K21BP2 |